
emco DIPLOMAT Original Mats in standard sizes with ribbed carp[illegible] sert

Model 522 R 1187 x 787



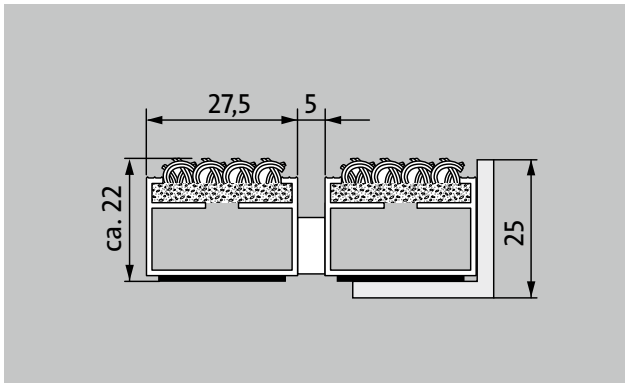

Description

Roll-up, extremely hard-wearing entrance mat in standard size for laying on the floor.

Indoor and outdoor (covered, Zone 1+2)

Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.

R 11 slip resistance as per DIN 51130



emco DIPLOMAT Original Mats in standard sizes with ribbed carpet insert

Model 522 R 1187 x 787

Standard profile clearance approx. (mm)	5 mm, rubber spacers
Connection	Plastic-coated stainless steel cable
Support chassis	Made using rigid aluminium with sound absorbing insulation on the underside
Tread surface	Recessed, robust, weather-proof, ribbed carpet strips.
Slip resistance	R 11 slip resistance as per DIN 51130
Flammability	Insert for Light Grey and Anthracite ribbed carpet colours available on request (surcharge applicable) with fire classification Cfl-s1 according to EN 13501.
Pile material	100% PP (polypropylene)
Colour fastness to artificial light ISO 105-B02	good 6
Colour fastness to rubbing ISO 105 X12	good 4
Colour fastness to water ISO 105 E01	good 5

Accessories
Rubber underlay 1 mm: GU 1
Rubber underlay 3 mm: GU 3
Rubber underlay 5 mm: GU 5
Mat joining brackets: MV Supplied as standard with mats in several parts

Suitable for:
Family home

Insert certified to TÜV PROFiCERT- product interior (Standard)
French VOC regulation
LEED v4 (outside North America)
BREEAM Exemplary Level
Belgian VOC regulation
AgBB (Committee for Health-related Evaluation of Building Products)
MVV TB Appendix 8, 9 / ABG

Service and services
Ribbed carpet strips can be subsequently replaced on site by a emco service engineer (mobile ribbed carpet replacement machine).
The product can be disposed of or recycled in an environmentally friendly way.

emco DIPLOMAT Original Mats in standard sizes with ribbed carpet insert

Model 522 R 1187 x 787


Colours



Anthracite no. 200



Brown no. 485

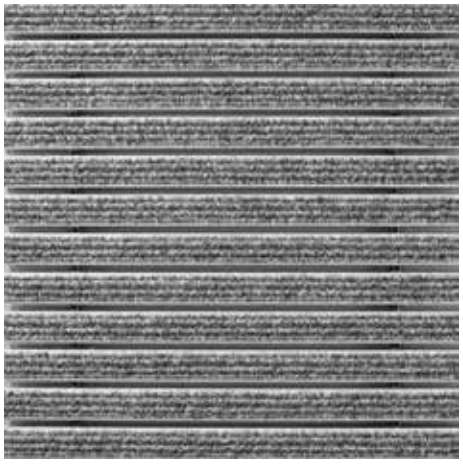

Light grey no. 220



Red no. 305



Sand no. 430

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems) · Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email: bau@emco.de · www.emco-bau.com