SCHEDA TECNICA STRUTTURA TIPO
TECHNICAL CHART SUBSTRUCTURE TYPE

SNF S/L/M






L'Azienda si riserva il diritto di modificare i contenuti delle schede tecniche in qualsiasi momento senza alcun preavviso.

The Company reserves the right to modify the content of technical charts without prior notice.





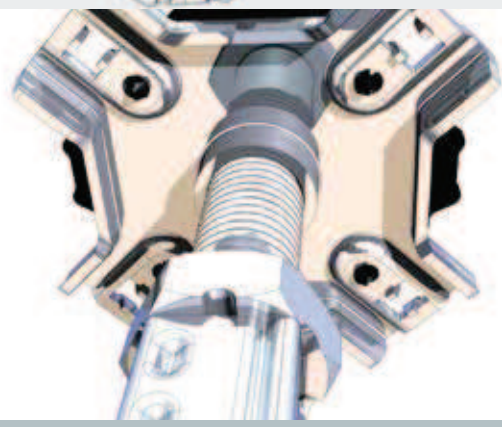

Struttura di sostegno completamente in acciaio costituita dai seguenti elementi:		
1	**Piedino**	**Testa**: in acciaio zincato stampato a freddo, Ø 90x2,6 mm, a 4 razze per accogliere i traversi tramite aggancio a scatto (snap-on)
		Tubo: a sezione quadra in acciaio altoresistenziale prezincato a caldo, 18,5x18,5x1,2 mm, di altezze diverse e munito di dado di regolazione posto sulla barra filettata. Oltre i 298 mm di lunghezza si utilizza il tubo Ø 20x2 mm
		Base: in acciaio zincato, dim. 90x90 mm con 4 fori Ø 8,5 mm, per eventuale fissaggio meccanico a terra e con nervature per adattarsi ai fondi non perfettamente regolari
2	**Traverso**	vedi elenco a lato
3	**Guarnizione**	in materiale termoplastico antirombo e antiurto di spessore da 1 a 2,5 mm
4	**Dimensioni modulo**	nominale 60x60 cm
Steel substructure composed by:		
1	***Pedestal***	***Head**: in galvanized steel, with 4 spokes arranged to seat the stringers, included 4 holes drilles on the tabs for fastening the stringers (snap-on)*
		***Tube**: square pipe in high strength hot-dip galvanized steel, 18,5x18,5x1,2 mm, with different heights and with notches on the adjustment nut on the tie-rod. For lengths over 298 mm, pipe dia. 20x2 mm is used*
		***Base plate**: in galvanized steel, dim. 90x90 mm with 4 holes Ø 8,5 mm for mechanical anchoring to the floor if required and with central flaring for adapting to not perfectly regular floor surfaces*
2	***Stringer***	*see the list at side*
3	***Gasket***	*thermoplastic material for an optimal stamping noise attenuation, from 1 to 2,5 mm thk.*
4	***Grid dimensions***	*nominal 60x60 cm*

Dati tecnici
Technical Data

SNF

Altezza nominale piedino Nominal *Pedestal height*	Campo di regolazione *Regulation range*	Peso medio modulo 600x600 mm *Average weight with 600x600 mm grid*			Carico assiale massimo *Maximum axial load EN 12825*
mm	mm	kg/m²			kN
		S	L	M	
57	45/70	0,95	2,34	3,09	50
92	75/100	1,20	2,59	3,34	48
215	180/250	1,66	3,05	3,80	47
247	200/295	1,75	3,14	3,89	43,50
315	280/350	1,98	3,37	4,12	40
965	905/1.055	4,39	5,78	6,53	10

LEGENDA TRAVERSI
STRINGER KEY

S =	senza traversi	*stringerless*	-
L =	traverso leggero	*light stringer*	15/18 mm
M =	traverso medio	*medium stringer*	30 mm

Newfloor
STEP IT UP

La presente scheda tecnica annulla e sostituisce tutte le precedenti.
This technical chart supersedes all previous issues.