
Model Classic



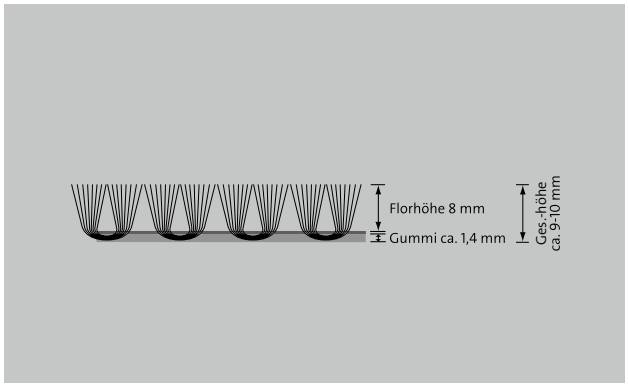


Description

Robust carpet mat that picks up dirt and absorbs moisture in 5 standard colours. Protects floors and floor coverings. Reduces cleaning costs. Versatile, can be used in industrial and administration areas.

Colours


C10 Grey


C20 Rock


C30 Graphite


C50 Dark Blue





Model Classic

Backing material	emco FLEX® rubber coating, thickness approx. 1.4 mm plus border reinforcement, smooth or dimpled
Border width	Approx. 20 mm
Pile height	Approx. 8 - mm
Pile material	High twist nylon (100% polyamide 6), effective pile weight 650 g/m2
Height	Approx. 10 - mm
Total weight (g/m²)	2500
Dimension tolerance in %	3
Tread border label	By request
Water absorption	Approx. 3 to 4 litres per m2
Max. washing temperature °C	80
Oil resistant (nitrile rubber back)	Extremely good
Electrostatic behaviour	Extremely low electrostatic charging, volume resistance 2.2 x 1011 Ohms, in acc. with DIN 54345

Resistance to fire	Available on request (surcharge applicable) with fire classification Cfl-s1 according to EN 13501.
Warranty	Statutory warranty period 2 years, subject to proper care, cleaning and storage.
Standard width (cm)	85 x 75 85 x 120 85 x 150 100 x 200 115 x 180 115 x 200 115 x 240 150 x 200 150 x 250 200 x 200 200 x 300 200 x 400 Special dimensions possible, up to 200 x 500 cm

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems) · Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email: bau@emco.de · www.emco-bau.com