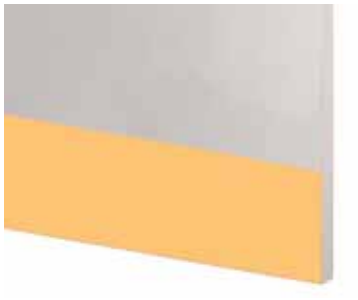


Contact 350
// 15 colours*

0001 Chalk | 0011 Pebble | 0002 Gravel | 0003 Clay | 0004 Granite | 0009 Sienna | 0005 Schist | 0006 Ivory | 0007 Wicker | 0021 Straw | 0022 Apricot | 0027 Melon | 0017 Bluebell | 0020 Denim | 0024 Bamboo

Contact 200
// 31 colours

0001 Chalk | 0031 Alum | 0032 Flint | 0033 Slate | 0011 Pebble | 0002 Gravel | 0003 Clay | 0004 Granite | 0014 Cinnamon | 0009 Sienna | 0010 Bark | 0005 Schist | 0006 Ivory | 0007 Wicker | 0008 Sand

0013 Greige | 0021 Straw | 0022 Apricot | 0027 Melon | 0028 Poppy | 0015 Lavender grey | 0030 Iris | 0029 Garnet | 0016 Glacier | 0018 Azure | 0017 Bluebell | 0020 Denim | 0024 Bamboo | 0023 Meadow | 0025 Emerald | 0019 Ultramarine

** and 16 colours with minimum order quantity.*

FOOT-HEIGHT DOOR

CONTACT
ADHESIVE PROTECTION PLATES

Bs2d0

100% antibacterial

SUSTAINABLE FOUNDATION

DESCRIPTION


- Model: Contact 350 or 200 adhesive protection plate
- Height: 350 or 200 mm
- Thickness: 2.5 mm
- Length: 4 m
- Material: antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: smooth with decorative grooves
- Fixing: adhesive foam strips reinforced with SPM universal mastic glue
- Colours:
  - 31 standard for Contact 200
  - 15 standard for Contact 350

SPECIFICATION

- Description: adhesive protection plate (Contact 350 or 200 as manufactured by SPM) from smooth and antibacterial PVC achieving Bs2d0 fire rating with solid colour. PVC profile is 350 or 200 mm high and 2.5 mm thick. It provides a smooth surface finish with decorative grooves. A protective film is specified to minimise cleaning before acceptance. It is provided with 2 or 3 strips of foam adhesive tape for fixing.
- Environment: no heavy metals and no substance potentially subjected to any REACH restriction are used in its manufacture, nor PBT/BPA. The calcium-zinc thermal stabilisation process is used. The emission level of volatile substance in inside air has been tested according to ISO 16000-6 and is very low (A+) according to the French regulation (23 March 2011 nr 2011-321 Decree and 19 April 2011 Order). 100% of the product are recyclable.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: adhesive. SPM universal mastic glue is recommended for stronger fixing.



Recommended protection height: 200 mm or 350 mm

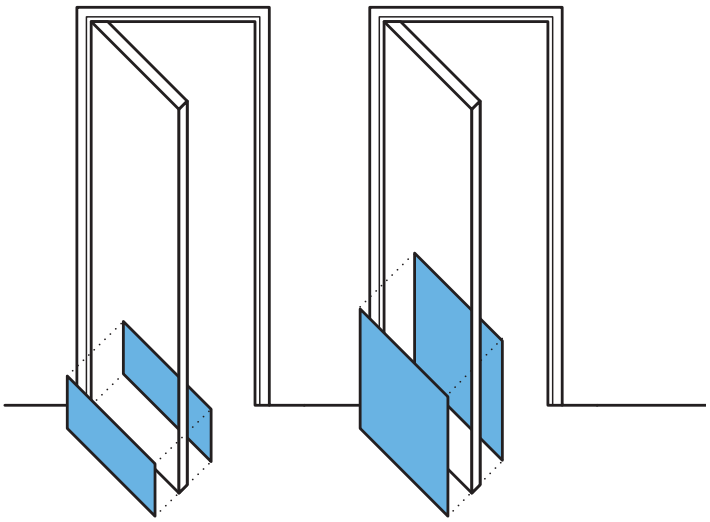

Contact 200 Contact 350

Specifications and section drawings on our website www.spm-international.com

bimobject BimObject in Revit and Archicad

Spm wall protection

Wall protections and handrails
Tel. : +33 (0)5 34 39 41 00
Fax : +33 (0)5 34 39 40 10
export@spm.fr

www.spm-international.com

A company of Gerflor