



ESCORT - DECOWOOD & ANODISED
ROUND HANDRAILS - DIAMETER 40 MM

BACTERICIDAL JOINT

APPLICATIONS


Particularly elegant handrails with a wood effect or satin silver anodised aluminium finish and curved, unobtrusive brackets. They are ideal for all buildings open to the public: corridors and stairways in retirement homes, schools, hotels, residential apartment buildings, offices, etc.

Escort can be bent for curved sections. A removeable system is available to provide continuation of the handrail in front of service ducts.

They are fitted with bactericidal joints (refer to page 108.


SPECIFICATION

- Description: round wood effect handrail (Escort – Decowood as manufactured by SPM) or satin silver anodised aluminium (Escort – Anodised as manufactured by SPM) with a diameter of 40 mm and an overall projection and height of 80 mm. It consists of a 1.5 mm thick continuous aluminium profile and a matching closer underneath. The section comprises a groove into which brackets and matching closer slide and lock. Wall fixing is by 40 mm deep satin silver anodised aluminium brackets with 2-point self-locking: curved and perforated (80 mm wide), curved and full (60 mm wide) or bugled (55 mm wide).Various smooth and antibacterial PVC accessories (round or flat endcaps, external and internal 90° angle pieces or made-to-measure from 90 to 165°, wall returns), supplied with bactericidal joints, are available in wood effect or anodised look or chromium look to finish the handrail assembly and are sleeved into the profile. All technical solutions are available to ensure continuity around corners (90° or made-to-measure), in staircases (slope link or 3-way "universal joint" rotation angle –Rapid'Angle® as manufactured by SPM-), across service ducts (quick removable assembly wedge or articulated link –Rapid'Access® as manufactured by SPM-) and around curved sections (pre-curved in the factory).
- Environment: no heavy metals and no substance potentially subjected to any REACH restriction are used in its manufacture, nor PBT/BPA. The calcium-zinc thermal stabilisation process is used. The emission level of volatile substance in inside air has been tested according to ISO 16000-6 and is very low (A+) according to the French regulation (23 March 2011 nr 2011-321 Decree and 19 April 2011Order). 100% of the product are recyclable.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: upper edge of section 0.90 m max. above floor level. Fixes to 2-point self-locking aluminium brackets screwed to the wall at 1.20 m centres (0.80 m centres in heavy traffic corridors and on light partitions like plasterboard). Wall returns, endcaps and angles to be fixed with 2.5 mm Allen clamping screws.

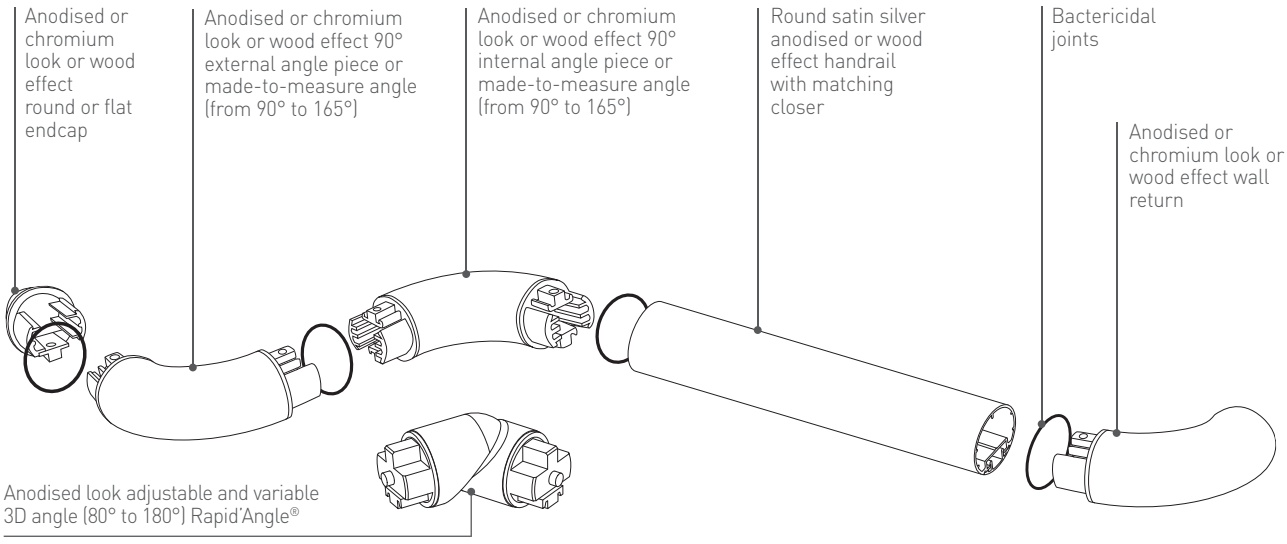




80 mm perforated
self-locking aluminium bracket
satin silver anodised



60 mm full
self-locking aluminium bracket
satin silver anodised



55 mm bugled
self-locking aluminium bracket
satin silver anodised

spm wall protection

Wall protections and handrails
Tel. : +33 (0)5 34 39 41 00
Fax : +33 (0)5 34 39 40 10
export@spm.fr

www.spm-international.com

A company of Gerflor

Escort-Decowood
// 3 finishes for accessories



Anodised look | Wood effect | Chromium look

Escort-Decowood
// 6 wood effect decors



Escort
Anodised




ESCORT
DECOWOOD & ANODISED

Bs2d0


DESCRIPTION

- Model: Escort - Decowood or Escort - Anodised round handrail
- Diameter: 40 mm
- Length: 4 m
- Overall projection: 80 mm (or 90 mm on request)
- Stand-off from wall: 40 mm (or 50 mm on request)
- Material: 10 micron satin silver anodised aluminium or wood effect PVC, batericidal joint
- Fixing: on 2-point bactericidal joint self-locking brackets, satin silver anodised aluminium, screwed to wall at 1.20 m centres (0.80 m centres in heavy traffic corridors and on light partitions like plasterboard)
- Colours:
  - 6 wood effect standard decors for Escort - Decowood
  - satin silver anodised for Escort - Anodised
  - coating on request.

ESCORT DECOWOOD





ESCORT ANODISED







80 mm perforated
self-locking aluminium bracket satin silver anodised
(overall projection 80 mm)

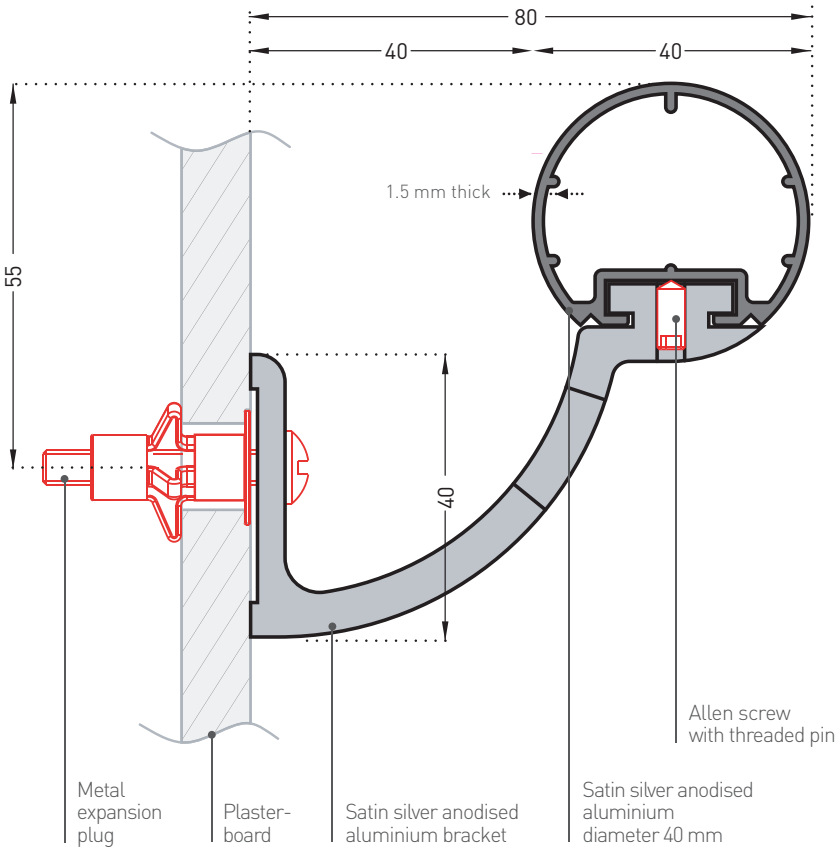




60 mm full
self-locking aluminium bracket satin silver anodised
(overall projection 80 mm

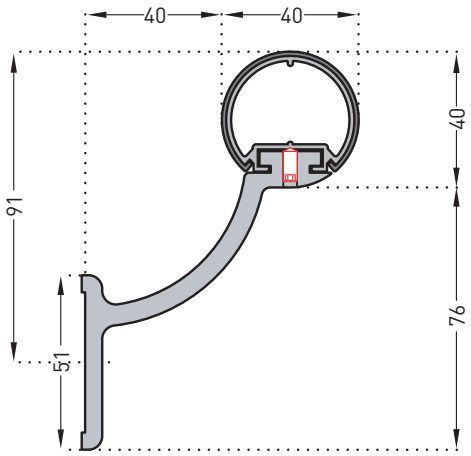



55 mm bugled
self-locking aluminium bracket satin silver anodised
(overall projection 80 mm)

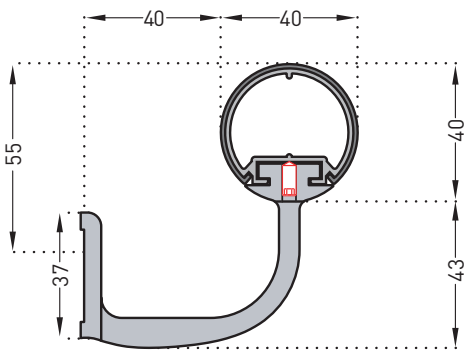

Specifications and section drawings on our website
www.spm-international.com
BimObject in Revit and Archicad

bimobject

spm wall protection

Wall protections and handrails
Tel. : +33 (0)5 34 39 41 00
Fax : +33 (0)5 34 39 40 10
export@spm.fr

www.spm-international.com

A company of Gerflor